

40V, 300mA, Low Quiescent Current Adjustable Output Linear Regulator

The Future of Analog IC Technology

DESCRIPTION

The MP2019 is a low-power linear regulator that supplies power to systems with highvoltage batteries. It includes a wide 3V to 40V input range, low-dropout voltage, and a low quiescent-supply current. The low quiescent current and low dropout voltage allow operations at extremely low-power levels. Therefore, the MP2019 is ideal for low-power microcontrollers and battery-powered equipment.

The MP2019 provides a wide variety of fixed output-voltage options (if requested): 1.8V, 1.9V, 2.3V, 2.5V, 3.0V, 3.3V, 3.45V, and 5.0V; also, it provides the output-adjustable option (from 1.25V to 15V).

The regulator output current is limited internally, and the device is protected against short-circuit, over-load, and over-temperature conditions.

The MP2019 includes thermal shutdown (TSD), current-limiting fault protection, and is available in a SOIC-8 EP package.

FEATURES


- 3V to 40V Input Range
- 10µA Quiescent Supply Current
- Stable with Low-Value Output Ceramic Capacitor (> 0.47µF)
- 300mA Specified Current
- Fixed 5V, 3.3V, and Adjustable Output (1.2 V to 15 V) Versions
- Output ±2% Accuracy Over Temperature
- Specified Current Limit
- Power Good
- Programmable Power Good Delay
- Thermal Shutdown and Short-Circuit
 Protection
- -40°C to +125°C Specified Junction-Temperature Range
- Available in a SOIC-8 EP Package

APPLICATIONS


- Industrial/Automotive Applications
- Portable/Battery-Powered Equipment
- Ultra-Low Power Microcontrollers
- Cellular Handsets
- Medical Imaging

All MPS parts are lead-free, halogen-free, and adhere to the RoHS directive. For MPS green status, please visit the MPS website under Quality Assurance. "MPS" and "The Future of Analog IC Technology" are registered trademarks of Monolithic Power Systems, Inc.

TYPICAL APPLICATION



Output-Adjustable Version



Output-Fixed Version



ORDERING INFORMATION

Part Number*	Package	Top Marking
MP2019GN	SOIC-8 EP	
MP2019GN-33	SOIC-8 EP	See Below
MP2019GN-5	SOIC-8 EP	

* For Tape & Reel, add suffix –Z (e.g. MP2019GN–Z);

TOP MARKING

MP2019 LLLLLLLL MPSYWW

MP2019: part code of MP2019GN; LLLLLLL: lot number; MPS: MPS prefix: Y: year code; WW: week code:

TOP MARKING

M2019-33 LLLLLLLL MPSYWW


MP2019-33: part code of MP2019GN-33 LLLLLLL: lot number; MPS: MPS prefix: Y: year code; WW: week code:

TOP MARKING

MP2019-5 LLLLLLLL MPSYWW

MP2019-5: part code of MP2019GN-5 LLLLLLL: lot number; MPS: MPS prefix: Y: year code; WW: week code:





PACKAGE REFERENCE

ABSOLUTE MAXIMUM RATINGS (1)

IN, EN	0.3V to +42V
OUT	0.3V to +17V
PG	0.3V to +15V
PGDL, FB	0.3V to +6V
Junction Temperature	+150°C
Lead Temperature	+260°C
Storage Temperature	65°C to +150°C
Continuous Power Dissipation	$(T_A = +25^{\circ}C)^{(2)}$
SOIC-8 EP	

ESD SUSCEPTIBILITY⁽³⁾

HBM (Human Body M	ode)4kV
MM (Machine Mode)	

Recommended Operating Conditions (4)

Supply Voltage V _{IN}	3V to 40V
Output Voltage VOUT	1.25V to 15V
Operating TemperatureT_J=	-40°C to +125°C

Thermal Resistance ⁽⁵⁾ θ.ΙΔ θ_{JC} SOIC-8 EP......5010 ...°C/W

Notes:

- 1) Exceeding these ratings may damage the device.
- 2) The maximum allowable power dissipation is a function of the maximum junction temperature T_J (MAX), the junction-to-ambient thermal resistance θ_{JA} , and the ambient temperature T_A. The maximum allowable continuous power dissipation at any ambient temperature is calculated by P_D (MAX) = (T_J (MAX)- T_A)/ θ_{JA} . Exceeding the maximum allowable power dissipation produces an excessive die temperature, causing the regulator to go into thermal shutdown. Internal thermal shutdown circuitry protects the device from permanent damage.
- Devices are ESD sensitive. Handle with precaution. 3)
- 4) The device is not guaranteed to function outside of its operating conditions.
- Measured on JESD51-7, 4-layer PCB. 5)



ELECTRICAL CHARACTERISTICS

 $V_{IN} = V_{EN} = 13.5V$, $T_J = +25^{\circ}C$, unless otherwise noted.

Parameter	Symbol	Condition	Min	Тур	Max	Units	
Input Voltage	V _{IN}			3		40	V
Output-Voltage Range	V _{OUT}			1.25		15	V
			0 <i<sub>LOAD<1mA</i<sub>		10	15	μA
		MP2019GN	1mA <i<sub>LOAD<30mA</i<sub>		15	21	
			30mA <i<sub>LOAD<300mA</i<sub>		65	95	
			0 <i<sub>LOAD<1mA</i<sub>		12	16	μA
GND Current	I _{GND}	MP2019GN-33	1mA <i<sub>LOAD<30mA</i<sub>		16	22	
			30mA <i<sub>LOAD<300mA</i<sub>		65	95	
			0 <i<sub>LOAD<1mA</i<sub>		12	16	
		MP2019GN-5	1mA <i<sub>LOAD<30mA</i<sub>		16	22	μA
			30mA <i<sub>LOAD<300mA</i<sub>		65	95	
Shutdown Supply Current	I _S	V _{EN} =0V				1	μA
Load Current Limit	I _{LIMIT}	$V_{IN}=7V, V_{OUT}=0V$	/	600	1000	1350	mA
FB Voltage	V _{FB}	MP2019GN, FB =	OUT, I _{LOAD} =5mA	1.225	1.25	1.275	V
		MP2019GN-33, I _{LOAD} =5mA MP2019GN-5, I _{LOAD} =5mA		3.2	3.3	3.4	v
Output Voltage Accuracy				4.85	5	5.15	
	V _{dropout}	MP2019GN	V _{OUT} =5V, I _{LOAD} = 150mA		200	400	mV
			V_{OUT} =5V, I _{LOAD} = 300mA		420	550	
Dropout Voltage ⁽⁶⁾		MP2019GN-33	V_{OUT} =3.3V, I_{LOAD} = 150mA		230	430	
Diopout voltage			V_{OUT} =3.3V, I_{LOAD} = 300mA		480	640	
		MP2019GN-5	V_{OUT} =5V, I _{LOAD} = 150mA		230	430	
			V_{OUT} =5V, I _{LOAD} = 300mA		480	640	
FB Input Current	I _{FB}	MP2019GN	V _{FB} = 1.3V			50	nA
		MP2019GN	V_{IN} = 3V to 40V, I_{LOAD} = 5mA, V_{OUT} = V_{FB}	-10	1	10	
Line Regulation		MP2019GN-33	V_{IN} = 5V to 40V, I_{LOAD} = 5mA, V_{OUT} = 3.3V	-10	1	10	mV
		MP2019GN-5	$V_{IN} = 6V$ to 40V, $I_{LOAD} = 5mA$, $V_{OUT} = 6V$	-10	1	10	



ELECTRICAL CHARACTERISTICS (continued)

 $V_{IN} = V_{EN} = 13.5V$, $T_J = +25$ °C, unless otherwise noted.

Parameter	Symbol	Condition			Тур	Max	Units
		MP2019GN	$I_{LOAD} = 5mA$ to 300mA, $V_{OUT} = 5V$		1	15	
Load Regulation		MP2019GN-33	$I_{LOAD} = 5mA$ to 300mA, $V_{OUT} = 3.3V$		1	15	mV
		MP2019GN-5	$ I_{\text{LOAD}} = 5\text{mA to } 300\text{mA}, \\ V_{\text{OUT}} = 5\text{V} $		1	15	
		100Hz, C _{OUT} = 10	uF, I _{LOAD} =10mA		57		dB
Output Voltage PSRR ⁽⁷⁾		1 kHz, C _{OUT} = 10μ F	⁼ , I _{LOAD} =10mA		45		dB
		$100 \text{kHz}, C_{\text{OUT}} = 10$)μF, I _{LOAD} =10mA		51		dB
		MP2019GN	$\begin{array}{l} R_{LOAD} \texttt{=} 500\Omega, \ V_{OUT} \texttt{=} 5V, \\ C_{OUT} \texttt{=} 22\muF, V_{OUT} \ \textit{from} \\ 10\% \ to \ 90\% \end{array}$		0.9	1.5	
Start-Up Response Time		MP2019GN-33	$\begin{array}{l} R_{LOAD} \texttt{=} 500\Omega, V_{OUT} \texttt{=} 3.3V, \\ C_{OUT} \texttt{=} 22\muF, V_{OUT} \text{ from} \\ 10\% \text{ to } 90\% \end{array}$		0.5	1	ms
		MP2019GN-5	$\begin{array}{l} R_{\text{LOAD}} = 500\Omega, V_{\text{OUT}} = 5V, \\ C_{\text{OUT}} = 22\muF, V_{\text{OUT}} \text{ from} \\ 10\% \text{ to } 90\% \end{array}$		0.9	1.5	
EN Threshold Voltage	V _{IL}					0.3	V
EN THESHOL VOILage	V _{IH}			1.8			V
EN Input Current		EN = 0V or 15V			0.1	0.5	μA
		MP2019GN MP2019GN-33		89%	93%	97%	V _{FB}
PG Rising Threshold				88%	92%	96%	
		MP2019GN-5		88%	92%	96%	
PG Rising Threshold Hysteresis					5%		V_{FB}
PG Low Voltage		Sink 1mA Current			0.1	0.4	V
PG Leakage Current		V _{PG} =5V				1	μA
PGDL Charging Current		V _{PGDL} =1V		3	5.5	9	μA
PGDL Rising Threshold				1.4	1.7	2	V
PGDL Falling Threshold				0.2	0.4	0.7	V
PG Delay Time		C _{PGDL} =47nF		5	10	15	ms
PG Reaction Time		C _{PGDL} =47nF			0.5	2	μs
Thermal Shutdown ⁽⁷⁾	T_{SD}				165		°C
Thermal Shutdown Hysteresis ⁽⁷⁾	ΔTSD				30		°C

Notes:

6) Dropout Voltage: Measured when the output voltage VOUT has dropped 100mV from the nominal value obtained at VIN=13.5V.


7) Derived from bench characterization. Not tested in production.



PIN FUNCTIONS

Pin #	Name	Description
1	OUT	Regulated Output Voltage. Only a low-value ceramic capacitor ($\geq 0.47\mu$ F) on the output is required for stability.
2	NC	No Connection. Do NOT connect.
3	GND	Ground. Connect the exposed pad and GND to the same ground plane.
4	VIN	Input Voltage. Connect a 3V to 40V supply to VIN.
5	EN	Regulator On/Off Control Input. Logic low shuts down the IC; logic high starts up the IC. Connect EN to VIN for automatic start-up.
6	PG	Power Good. If not used, pin can be left floating.
7	PGDL	Programmable Power-Good Delay Time. If not used, pin can be left floating.
8	FB	Feedback Input for Output Adjustable Version. FB is regulated to 1.25V nominally. This terminal is used to set the output voltage.




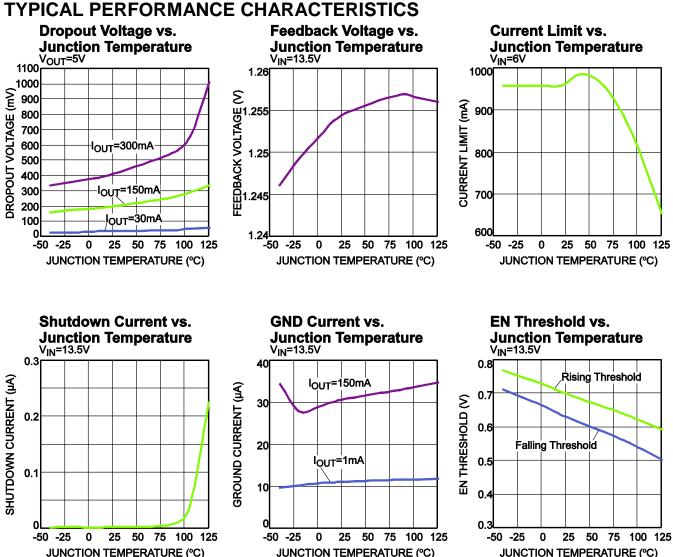

JUNCTION TEMPERATURE (°C)

TYPICAL PERFORMANCE CHARACTERISTICS



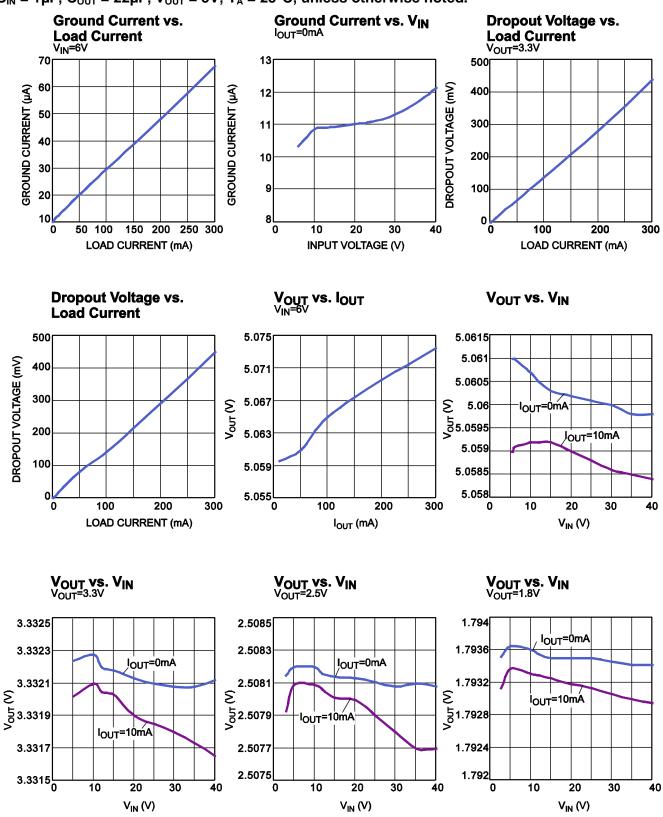


www.MonolithicPower.com MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited. © 2018 MPS. All Rights Reserved.



TYPICAL PERFORMANCE CHARACTERISTICS (continued)


 $C_{IN} = 1\mu F$, $C_{OUT} = 22\mu F$, $V_{OUT} = 5V$, $T_A = 25^{\circ}C$, unless otherwise noted.

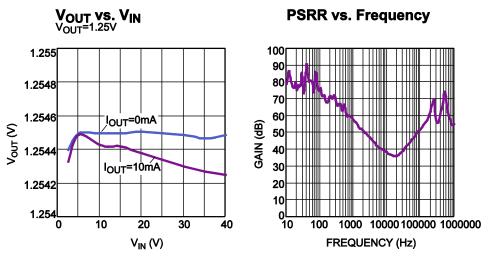




TYPICAL PERFORMANCE CHARACTERISTICS (continued)

 $C_{IN} = 1\mu F$, $C_{OUT} = 22\mu F$, $V_{OUT} = 5V$, $T_A = 25^{\circ}C$, unless otherwise noted.

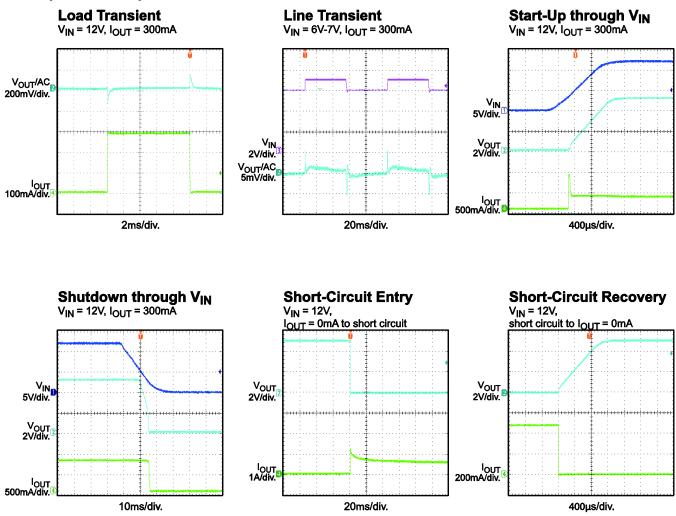

Short-Circuit Steady State





OPERATION

The MP2019 is a linear regulator that supplies power to systems with high-voltage batteries. It includes a wide 3V to 40V input range, low dropout voltage, and a low quiescent-supply current (see Fig. 1).

The MP2019 provides a wide variety of fixed output-voltage options: 1.8V, 1.9V, 2.3V, 2.5V, 3.0V, 3.3V, 3.45V, and 5.0V; also, it provides the output-adjustable option (from 1.25V to 15V).

The output-adjustable version has an output that is adjustable from 1.25V to 15V with a simple resistor divider. It uses external feedback, allowing the user to set the output voltage with an external resistor divider. The FB threshold is 1.25V, typically.

The IC enters shutdown mode when EN is low. In shutdown mode, the pass transistor, control circuitry, reference, and all biases turn off; this reduces the supply current to $<1\mu$ A. Connect EN to VIN for automatic start-up.

The regulator output current is limited internally, and the device is protected against short-circuit, over-load, and over-temperature conditions (see Fig. 2).

The peak output current is limited to around 1000mA, which exceeds the 300mA recommended continuous output current.

When the junction temperature is too high, the thermal sensor sends a signal to the control logic

which shuts down the IC. The IC will re-start when the temperature has cooled sufficiently.

The maximum power output current is a function of the package's maximum power dissipation for a given temperature.

The maximum power dissipation is dependent on the thermal resistance of the case and the circuit board, the temperature difference between the die junction and the ambient air, and the rate of air flow. GND and the exposed pad must be connected to the ground plane for proper dissipation.

MP2019 has one power good (PG) pin. The PG pin is the open drain of an internal MOSFET. It should be connected to V_{OUT} or external voltage source(<15V) through a resistor (i.e. 100kohm). After the V_{FB} reaches 93% of nominal value, the MOSFET turns off and PG pin is pulled to high by V_{OUT} or external voltage source. When the V_{FB} drops to 88% of nominal value, the PG voltage is pulled to GND.

There is a delay time when PG asserts high. The delay time can be programmed by adding a capacitor on PGDL. To select a capacitor for PGDL, use below equation:

$$C_{PGDL}(nF) = \frac{t_{PGDL}(ms) \times I_{PGDL}(\mu A)}{V_{th PGDL}(V)}$$

Where t_{PGDL} is the desired delay time for PG asserts high, I_{PGDL} is the PGDL charging current and V_{th} PGDL is 1.7V.

Figure 2 shows the power good timing.

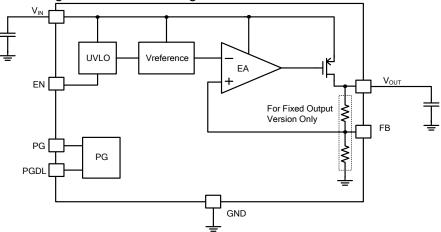
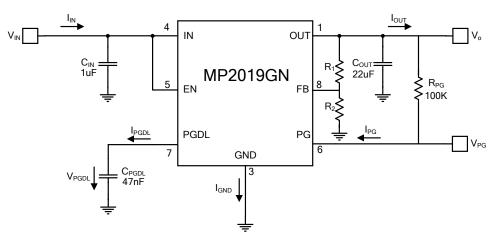


Figure 1. Functional Block Diagram





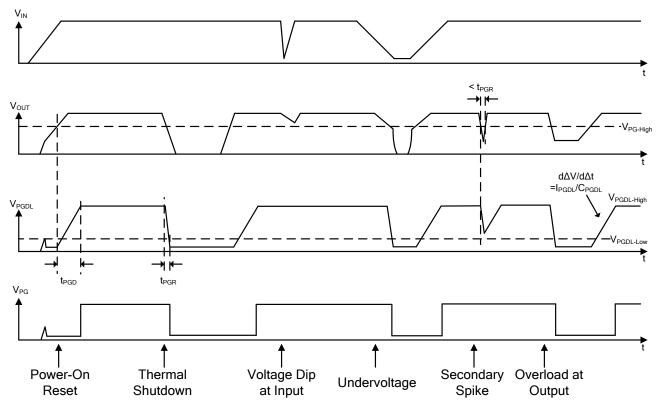


Figure 2. Power Good Timing



APPLICATION INFORMATION

COMPONENT SELECTION

Setting the Output Voltage

Set the output voltage of the MP2019 by using a resistor divider (see Fig. 3).




Figure 3. FB Resistor Divider to Set VOUT

Choose R2=1M Ω to maintain a 1.215 μ A minimum load. Calculate the value for R1 using the following equation:

$$R1 = R2 \times \left(\frac{V_{OUT}}{1.25V} - 1\right)$$

For a fixed-output version, VOUT can be adjusted by adding an external resistor divider (see Fig. 4). When choosing an external divider, take the internal FB resistor divider into consideration.




Figure 4. FB Divider for Fixed-Output Version

When R2 is selected, R1 can be calculated with the equation below:

$$R1 = \frac{R1_IN}{\frac{1.25 \times R1_IN \times (R2 + R2_IN)}{(V_{OUT} - 1.25) \times R2 \times R2_IN} - 1}$$

Table 1 below shows the internal FB resistor dividers for different fixed-output versions.

Table 1.	Internal	FΒ	Resistor	Divider
----------	----------	----	----------	---------

Fixed-Output Voltage	R1_IN	R2_IN
3.3V	1.64MΩ	1MΩ
5V	3MΩ	1MΩ

Table 2 below shows various output voltages for a fixed-output version with an external FB divider..

Table 2. 3.3V Fixed-Output Version with External
FB Divider

V _{OUT} (V)	R1 (kΩ)	R2 (kΩ)
11	80.6	10
8.5	59	10
8	54.9	10
6.5	43	10
5	30.1	10

Enable Control (EA)

EN is a digital control pin that turns the regulator on and off. When EN is pulled below 0.3V, the chip shuts down. When EN is pulled above 1.8V, the chip starts up. If this function is not used, EN can be connected to VIN directly.

Input Capacitor

For efficient operation, place a ceramic capacitor, (C1) between 1μ F and 10μ F of dielectric type (X5R or X7R) between the input pin and ground. Larger values in this range improve line transient response.

Output Capacitor

For stable operation, use a ceramic capacitor (C2) of type X5R or X7R between 1μ F and 22μ F. Larger values in this range improve load transient response and reduce noise. Output capacitors of other dielectric types may be used, but they are not recommended as their capacitance can deviate greatly from their rated value over temperature.

To improve load transient response, add a small ceramic (X5R, X7R, or Y5V dielectric) 2.2nF feed-forward capacitor in parallel with R1. The feed-forward capacitor is not required for stable operation.


Output Noise

The MP2019 exhibits noise on the output during normal operation. This noise is negligible for most applications. However, in applications that include analog-to-digital converters (ADCs) of more than 12 bits, consider the ADC's power supply rejection specifications. The feed-forward capacitor C2 across R1 reduces significantly the output noise.



External Reverse Voltage Protection

In some situations, e.g. a backup battery is connected as MP2019 load, the output voltage may be held up while the input is either pulled to ground, pulled to some intermediate voltage or is floating. Thus, the output voltage is higher than input voltage. Since the MP2019 PMOS pass element has a body diode, a current will conduct from the output to input and is not internally limited. It's possible that the IC will be damaged by this unlimited reverse current. To avoid this, it's recommended to place an external diode at input like below.





PCB Layout Guidelines

Efficient PCB layout is critical to achieve good regulation, ripple rejection, transient response, and thermal performance. It is recommended highly to duplicate the EVB layout for optimum performance.


If changes are necessary, refer to Fig. 5 and follow the guidelines below:

- 1) Place input and output bypass ceramic capacitors close to IN and OUT, respectively.
- Ensure all feedback connections are short and direct. Place the feedback resistors and compensation components as close to the chip as possible.
- Connect IN, OUT, and especially, GND, respectively, to a large copper area to cool the chip. This improves thermal performance and long-term reliability.





Top Layer



Bottom Layer Figure 5. Recommended PCB Layout

DESIGN EXAMPLE

Fig. 6 is a design example following the application guidelines for V_{OUT} =3.3V with a feed-forward cap:





Figure 6. Design Example



TYPICAL APPLICATION CIRCUITS









Figure 8. 3.3V Output with Feed-Forward Capacitor



PACKAGE INFORMATION

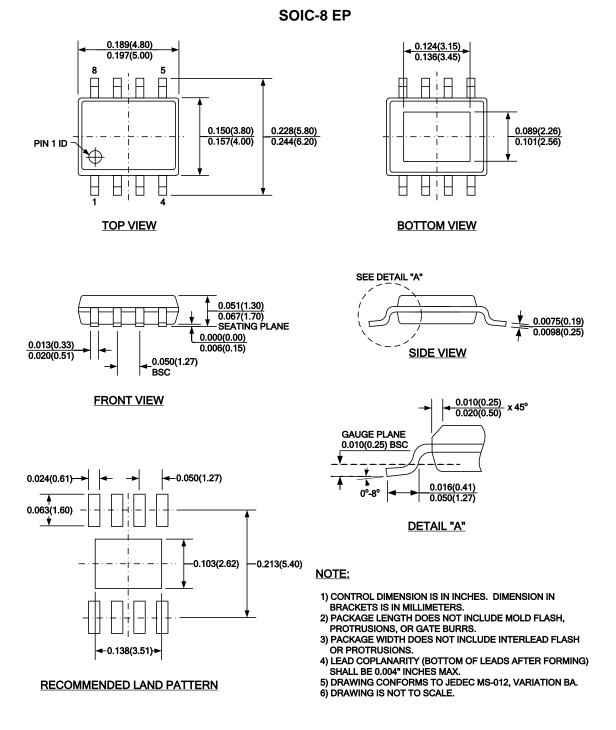

NOTICE: The information in this document is subject to change without notice. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Monolithic Power Systems (MPS):

<u>MP2019GN</u> <u>MP2019GN-Z</u> <u>MP2019GN-5</u> <u>MP2019GN-5-Z</u> <u>MP2019GN-33</u> <u>MP2019GN-33-Z</u> <u>MP2019GN-5-P</u> <u>MP2019GN-P</u> <u>MP2019GN-33-P</u>