IGBT - Field Stop 600 V, 60 A

FGH60N60SMD

Description

Using novel field stop IGBT technology, ON Semiconductor's new series of field stop 2nd generation IGBTs offer the optimum performance for solar inverter, UPS, welder, telecom, ESS and PFC applications where low conduction and switching losses are essential.

Features

- Maximum Junction Temperature: $T_J = 175$ °C
- Positive Temperature Co-efficient for easy Parallel Operating
- High Current Capability
- Low Saturation Voltage: $V_{CE(sat)} = 1.9 \text{ V (Typ.)} @ I_C = 60 \text{ A}$
- High Input Impedance
- Fast Switching: E_{OFF} = 7.5 uJ/A
- Tightened Parameter Distribution
- This Device is Pb-Free and is RoHS Compliant

Applications


• Solar Inverter, UPS, Welder, PFC, Telecom, ESS




ON Semiconductor®

www.onsemi.com


V _{CES}	I _C
600 V	60 A





TO-247-3LD CASE 340CK

MARKING DIAGRAM



\$Y = ON Semiconductor Logo &Z = Assembly Plant Code &3 = Numeric Date Code

&K = Lot Code

FGH60N60SMD = Specific Device Code

ORDERING INFORMATION

See detailed ordering and shipping information on page 2 of this data sheet.

ABSOLUTE MAXIMUM RATINGS

Symbol	Description		Ratings	Unit
V _{CES}	Collector to Emitter Voltage		600	V
V _{GES}	Gate to Emitter Voltage		±20	V
	Transient Gate to Emitter Voltage		±30	V
Ic	Collector Current	T _C = 25°C	120	А
		T _C = 100°C		А
I _{CM} (Note 1)	Pulsed Collector Current		180	А
I _F	Diode Forward Current	T _C = 25°C	60	А
	T _C = 100°C		30	А
I _{FM} (Note 1)	Pulsed Diode Maximum Forward Current		180	А
P _D	Maximum Power Dissipation	Maximum Power Dissipation T _C = 25°C		W
	T _C = 100°C		300	W
TJ	Operating Junction Temperature		-55 to +175	°C
T _{STG}	Storage Temperature Range		-55 to +175	°C
TL	Maximum Lead Temp. for Soldering Purposes, 1/8" from Case for 5 Seconds		300	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Repetitive rating: Pulse width limited by max. junction temperature.

THERMAL CHARACTERISTICS

Symbol	Parameter	Тур.	Max.	Unit
$R_{\theta JC}$ (IGBT)	Thermal Resistance, Junction to Case	_	0.25	°C/W
$R_{\theta JC}$ (Diode)	Thermal Resistance, Junction to Case	-	1.1	°C/W
$R_{ hetaJA}$	Thermal Resistance, Junction to Ambient	-	40	°C/W

PACKAGE MARKING AND ORDERING INFORMATION

Part Number	Top Mark	Package	Packing Method	Reel Size	Tape Width	Qty per Tube
FGH60N60SMD	FGH60N60SMD	TO-247	Tube	N/A	N/A	30

ELECTRICAL CHARACTERISTICS OF THE IGBT (T_C = 25°C unless otherwise noted)

Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Unit
FF CHARACT	ERISTICS	•	•	•		
BV _{CES}	Collector to Emitter Breakdown Voltage	$V_{GE} = 0 \text{ V, } I_{C} = 250 \mu\text{A}$	600	-	_	V
$\Delta BV_{CES} / \Delta T_{J}$	Temperature Coefficient of Breakdown Voltage	$V_{GE} = 0 \text{ V}, I_{C} = 250 \mu A$	-	0.6	-	V/°C
I _{CES}	Collector Cut-Off Current	V _{CE} = V _{CES} , V _{GE} = 0 V	-	-	250	μΑ
I _{GES}	G-E Leakage Current	V _{GE} = V _{GES} , V _{CE} = 0 V	_	-	±400	nA
N CHARACTE	ERISTICS				-	
V _{GE(th)}	G-E Threshold Voltage	$I_C = 250 \mu A, V_{CE} = V_{GE}$	3.5	4.5	6.0	V
V _{CE(sat)}	Collector to Emitter Saturation Voltage	I _C = 60 A, V _{GE} = 15 V,	-	1.9	2.5	V
		I _C = 60 A, V _{GE} = 15 V, T _C = 175°C	_	2.1	-	٧
YNAMIC CHA	RACTERISTICS		•	•		•
C _{ies}	Input Capacitance	V _{CE} = 30 V, V _{GE} = 0 V,	-	2915	_	pF
C _{oes}	Output Capacitance	f = 1 MHz	_	270	_	pF
C _{res}	Reverse Transfer Capacitance	1	-	85	-	pF
WITCHING CH	HARACTERISTICS	-	•	•		•
T _{d(on)}	Turn-On Delay Time	$V_{CC} = 400 \text{ V}, I_{C} = 60 \text{ A},$	-	18	27	ns
T _r	Rise Time	$R_G = 3 \Omega$, $V_{GE} = 15 V$, Inductive Load, $T_C = 25^{\circ}C$	_	47	70	ns
T _{d(off)}	Turn-Off Delay Time	7	-	104	146	ns
T _f	Fall Time		_	50	68	ns
E _{on}	Turn-On Switching Loss		_	1.26	1.94	mJ
E _{off}	Turn-Off Switching Loss	7	_	0.45	0.6	mJ
E _{ts}	Total Switching Loss	7	-	1.71	2.54	mJ
T _{d(on)}	Turn-On Delay Time	$V_{CC} = 400 \text{ V}, I_C = 60 \text{ A},$	-	18	_	ns
T _r	Rise Time	$R_G = 3 \Omega$, $V_{GE} = 15 V$, Inductive Load, $T_C = 175^{\circ}C$	_	41	_	ns
T _{d(off)}	Turn-Off Delay Time	7	_	115	_	ns
T _f	Fall Time	7	-	48	-	ns
E _{on}	Turn-On Switching Loss		-	2.1	=	mJ
E _{off}	Turn-Off Switching Loss		-	0.78	_	mJ
E _{ts}	Total Switching Loss		-	2.88	-	mJ
Q_g	Total Gate Charge	V _{CE} = 400 V, I _C = 60 A, V _{GE} = 15 V	-	189	284	nC
Q _{ge}	Gate to Emitter Charge	VGE - 15 V	-	20	30	nC
Q _{gc}	Gate to Collector Charge		-	91	137	nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

ELECTRICAL CHARACTERISTICS OF THE DIODE (T_C = 25°C unless otherwise noted)

Symbol	Parameter	Test Conditions		Min	Тур	Max	Unit
V_{FM}	Diode Forward Voltage	I _F = 30 A	T _C = 25°C	-	2.1	2.7	V
			T _C = 175°C	-	1.7	-	
E _{rec}	Reverse Recovery Energy	I _F = 30 A, di _F /dt = 200 A/μs	T _C = 175°C	-	79	_	uJ
T _{rr}	Diode Reverse Recovery Time	uif/ut = 200 Λ/μο	T _C = 25°C	-	30	39	ns
			T _C = 175°C	-	72	-	
Q _{rr}	Diode Reverse Recovery Charge		T _C = 25°C	-	44	62	nC
			T _C = 175°C	-	238	_	

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

TYPICAL PERFORMANCE CHARACTERISTICS




Figure 1. Typical Output Characteristics




Figure 3. Typical Saturation Voltage Characteristics




Figure 5. Saturation Voltage vs. Case Temperature at Variant Current Level




Figure 2. Typical Output Characteristics




Figure 4. Transfer Characteristics




Figure 6. Saturation Voltage vs. V_{GE}

TYPICAL PERFORMANCE CHARACTERISTICS (Continued)




Figure 7. Saturation Voltage vs. V_{GE}




Figure 9. Capacitance Characteristics




Figure 11. SOA Characteristics




Figure 8. Saturation Voltage vs. V_{GE}




Figure 10. Gate Charge Characteristics




Figure 12. Turn-on Characteristics vs. Gate Resistance

TYPICAL PERFORMANCE CHARACTERISTICS (Continued)




Figure 13. Turn-off Characteristics vs. Gate Resistance




Figure 15. Turn-off Characteristics vs. Collector Current




Figure 17. Switching Loss vs. Collector Current




Figure 14. Turn-on Characteristics vs. Collector Current




Figure 16. Switching Loss vs.
Gate Resistance




Figure 18. Turn Off Switching SOA Characteristics

TYPICAL PERFORMANCE CHARACTERISTICS (Continued)




Figure 19. Current Derating




Figure 21. Forward Characteristics




Figure 23. Stored Charge




Figure 20. Load Current vs. Frequency




Figure 22. Reverse Current




Figure 24. Reverse Recovery Time

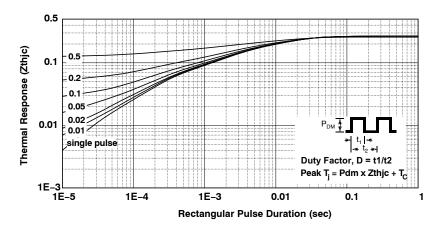


Figure 25. Transient Thermal Impedance of IGBT


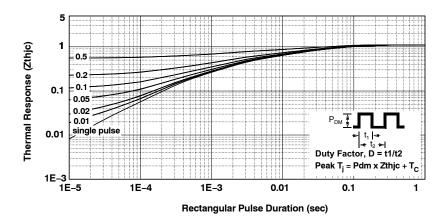


Figure 26. Transient Thermal Impedance of Diode

TO-247-3LD SHORT LEAD

CASE 340CK ISSUE A



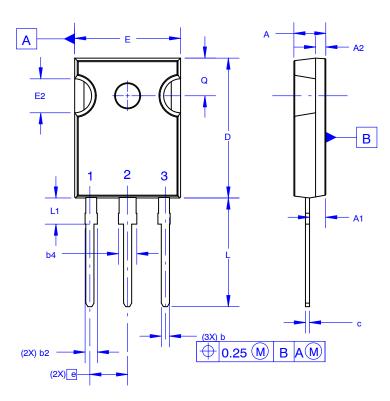

- A. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
- B. ALL DIMENSIONS ARE IN MILLIMETERS.
- C. DRAWING CONFORMS TO ASME Y14.5 2009.
- D. DIMENSION A1 TO BE MEASURED IN THE REGION DEFINED BY L1.
- E. LEAD FINISH IS UNCONTROLLED IN THE REGION DEFINED BY L1.

GENERIC MARKING DIAGRAM*



XXXX = Specific Device Code


A = Assembly Location

Y = Year

WW = Work Week

ZZ = Assembly Lot Code

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

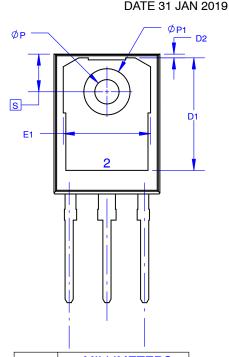

DIM	MILLIMETERS			
DIIVI	MIN	NOM	MAX	
Α	4.58	4.70	4.82	
A 1	2.20	2.40	2.60	
A2	1.40	1.50	1.60	
b	1.17	1.26	1.35	
b2	1.53	1.65	1.77	
b4	2.42	2.54	2.66	
С	0.51	0.61	0.71	
D	20.32	20.57	20.82	
D1	13.08	~	~	
D2	0.51	0.93	1.35	
E	15.37	15.62	15.87	
E1	12.81	?	~	
E2	4.96	5.08	5.20	
е	~	5.56	~	
L	15.75	16.00	16.25	
L1	3.69	3.81	3.93	
ØΡ	3.51	3.58	3.65	
ØP1	6.60	6.80	7.00	
Q	5.34	5.46	5.58	
S	5.34	5.46	5.58	

DOCUMENT NUMBER:	98AON13851G	Electronic versions are uncontrolled except when accessed directly from the Document Rep Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.			
DESCRIPTION:	TO-247-3LD SHORT LEAD		PAGE 1 OF 1		

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer pu

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Email Requests to: orderlit@onsemi.com

onsemi Website: www.onsemi.com

TECHNICAL SUPPORT North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative